


P80

PROJECTORS

ewo

T +39 0471 62 30 87
mail@ewo.com
ewo.com

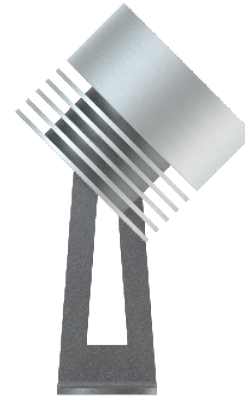

Materials

Projector housing in aluminum, silver anodized, mounting bracket in stainless steel satin finish, cover made of tempered safety glass, screw joints in stainless steel, silicone gasket, cable connection in nickel-plated brass.

Lighting technology

4 high-performance LEDs, metal core circuit board, precision lenses made of PMMA, external driver, incl. 0.5 m connection cable with water stop.


Application area

Architectural floodlighting, object and effect lighting, floor mounting, wall mounting and ceiling mounting.

| | |
|------------------------|--|
| Power rating | 180 lm, 2.5 W, 200 mA 740 lm, 8.5 W, 700 mA |
| Beam angle spot optics | 10° (RGBW not possible) 26° 50° 8–40° |
| Weight | 0.9 kg |
| Accessories | Driver, current feed: 200 mA–700 mA DMX-Driver DMX-Controller Connection cable Electrical connection |




 IP67 RoHS IK08



Colour temperature

More colour rendering indexes upon request



Warm white → 3.000 K
CRI ≥ 80



Neutral white → 4.000 K
CRI ≥ 80



RGBW

Light distributions

