



*if*

BOLLARDS

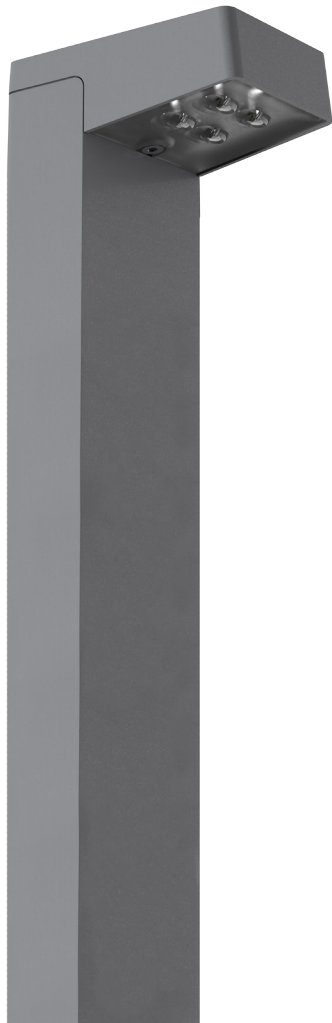

Dimension

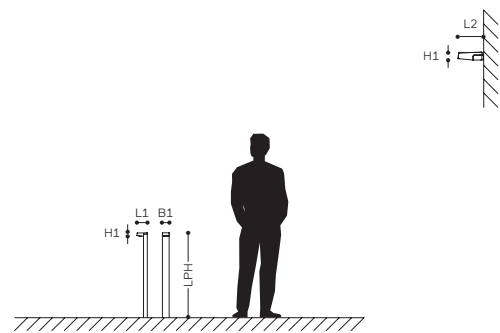

Model *if*

Bollard

Wall-mounted luminaire

- 1 Housing accommodates 1 LED lighting unit (LED Board: 4 LED)
- 2 Current feed: 250 mA
- 3 Various light distributions for walkway lighting
- 4 AP05 satiné, AS06 satiné
- 5 Lens made from PMMA
- 6 Housing made of aluminum
- 7 Pole made of extruded aluminum profile  
 Finish: polyester powder coating, silver-gray  
 (RAL 9007/DB 702), other colours upon request



- 8 Colour temperature More colour rendering indexes upon request



Warm white → 3.000 K  
 CRI ≥ 80



Neutral white → 4.000 K  
 CRI ≥ 80

Available Designs




Single




Wall-mounted

- 9 Light distributions



AP05 satiné



AS06 satiné

Model	LPH [m]	L1 [mm]	H1 [mm]	B1 [mm]	L2 [mm]	Lighting units	LED	Luminous flux [lm]②	Power [W]③
if	0.5	109	40	74	/	1	4	230-270	4.2
if	0.7	109	40	74	/	1	4	230-270	4.2
if	0.9	109	40	74	/	1	4	230-270	4.2
if-W	/	/	40	74	115	1	4	230-270	4.2