


**Description:**

Surface mount wall light with indirect source to provide diffused glow. Available in various colour temperatures, IP44, various finishes made from machined solid brass. UV stablized frosted diffuser, pre-fitted 500mm lead, remote driver.

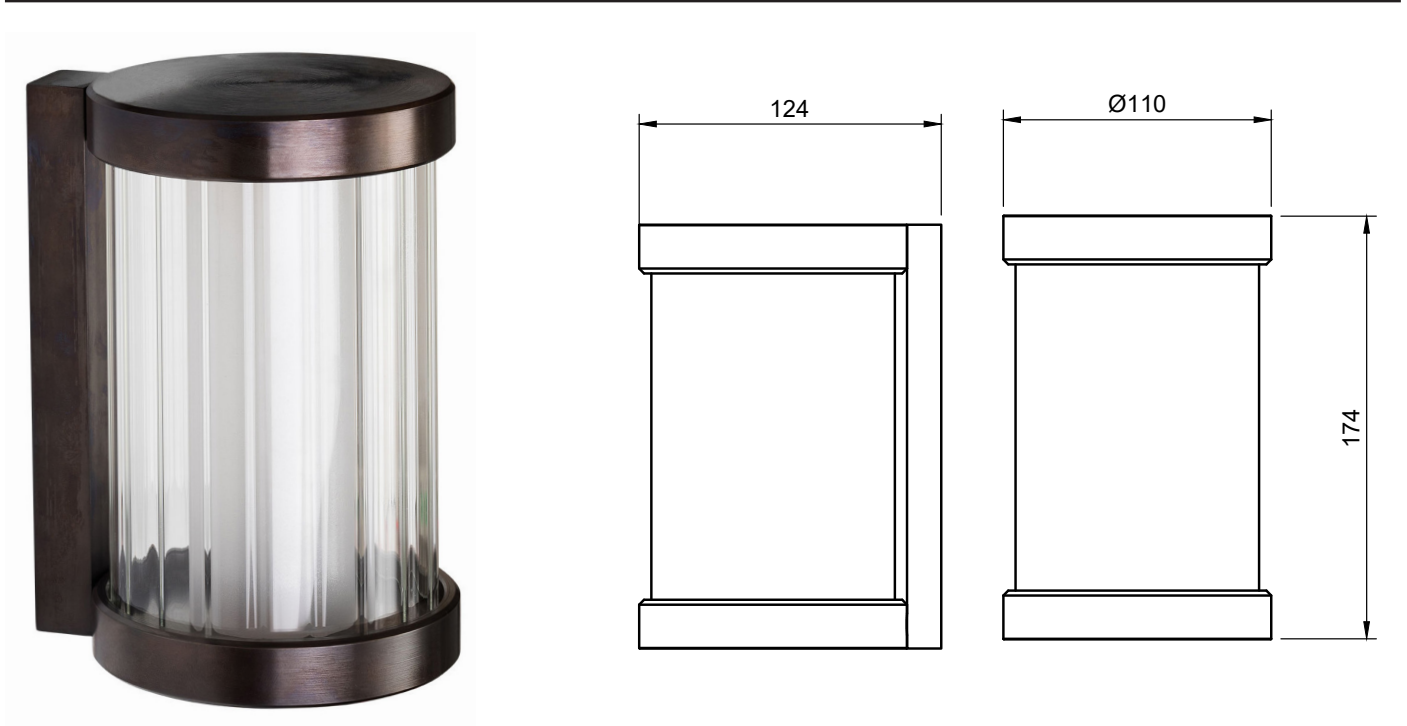

**Technical:**

LED TYPE	XHP-50 Gen 2	CONTROL GEAR	REMOTE
RATED POWER	4W	DIMMING PROTOCOL	DALI - 0-10V - PHASE DIM - ON/OFF
CRI	80	CABLE LENGTH	500MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	SURFACE WALL
INPUT POWER / FORWARD VOLTAGE	700mA / 6V	WEIGHT	2.5KG
NOMINAL LUMENS	990lm	HARDWARE	GLASS, WALL PLATE, CABLE
IP RATING	IP44	CONSTRUCTION	MACHINED METAL & HEATSINK
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

**Product Generator:** example NL1420-AB-D-30-W-4W-4-N/A

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL1420	AB Aged Brass	D Diffused 10°	27 2700K	W Wall Mounted	4W / 700mA	1 DALI	N/A
	CC Custom		30 3000K			2 1-10V	
			40 4000K			3 Phase	
						4 On/Off	

NL1420	-	-	-	-	-	-	-
--------	---	---	---	---	---	---	---