


# DARK ROUND WALLWASH 60

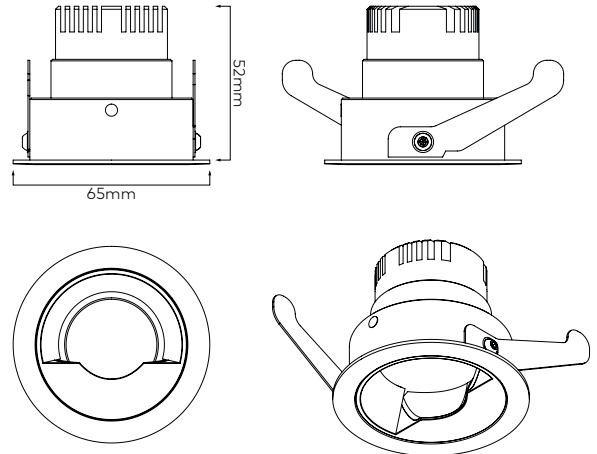

## LUMINAIRE SPECIFICATION

Height	Refer to line drawing
Bezel	Ø65mm
Hole cut-out	Ø60mm
Luminaire material	Aluminium with textured powder coat finish.
Light source	COB LED
Optics	Interchangeable lens & reflectors
Driver	Remote
IP Rating	IP20 and IP44 options

## LED SPECIFICATION

LED	Citizen high intensity	
Source LED output	4.5W	460lm
	6.3W	598lm
Typical delivered output	4.5W	356lm
	6.3W	461lm
CCT	2700K, 3000K, 4000K	
CRI	>90Ra	
Binning	2 Step	
Optics	35° with wallwash reflector	
Lifetime (L70)	>50,000 hrs based on LM-80 and TM-21 manufacturers applicable test data	
Driver requirement	Constant current	
Drive current	4.5W	: 500mA
	6.3W	: 700mA
Forward voltage	9VDC	

## ORDERING INFORMATION

example 23241L35.1SC32A5C

BEAM ANGLE	FINISH	REFLECTOR	LED CCT	DRIVER	VERSION	IP RATING
23241L35 35°	1 White	SC Silver chrome	2 2700K	1 Non dimming 2 Phase dimming 3 0-10V dimming 4 DALI dimming	A5C 4.5W CRI >90	4 IP20 IP44
	2 Black		3 3000K		A6C 6.3W CRI >90	
	7 Silver		4 4000K			