




Walkway lighting element
Accent lighting element



Façade lighting element
Object lighting element

Dimension

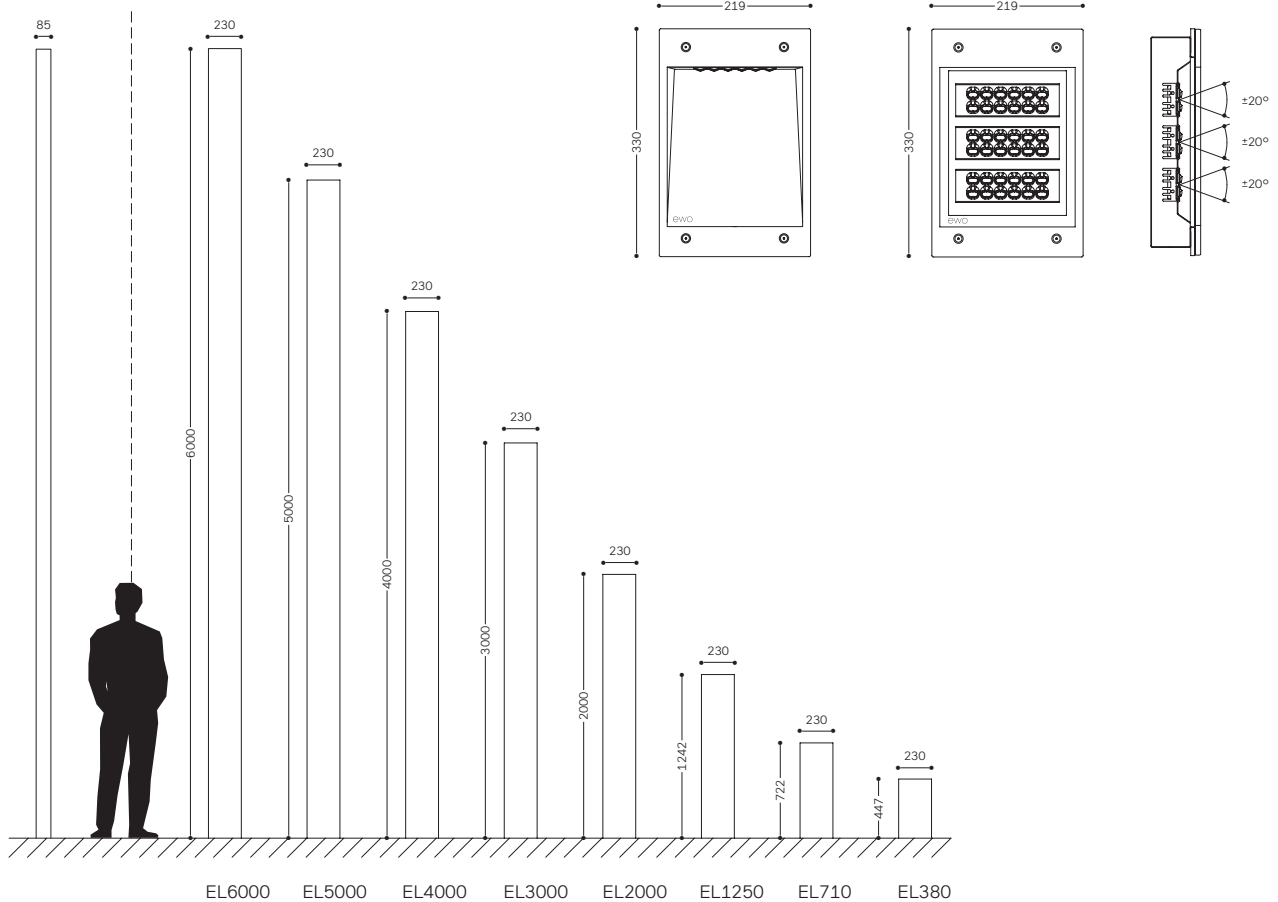

- 1 Housing accommodates up to 3 LED lighting units (LED Board: 12 LED) per element
- 2 Current feed: 200 mA–600 mA, depending on ambient temperature
- 3 Electronic operating device with DALI interface, 1–10 V or stand-alone programming
- 4 LED light units in the façade element can be adjusted continuously (± 20 degrees)
- 5 Various light distributions for area, high bay, street or walkway lighting
- 6 AH02, AP07, AS06, AS07, AS08 (also available in satiné version)
- 7 Lens made from PMMA, with aluminum support plate
- 8 Recessed in stainless steel, frameless cover in single-pane safety glass (ESG)
- 9 Pole: extruded aluminum profile (optional COR-TEN steel sheet) with cable insertion opening, junction box and service door
- 10 Finish: polyester powder coating, silver-gray (RAL 9007/DB 702), other colours upon request (optional COR-TEN steel)



Models / Equipment Variations



Walkway /
 accent lighting
 1 Lighting unit



Façade /
 object lighting
 1–3 Lighting units

Surface



Finish: polyester
 powder coated



Finish: COR-TEN steel

The lighting elements can be combined with the FA series (p. 34).



11 Colour temperature

More colour rendering indexes upon request



Warm white → 3.000 K
 CRI ≥ 80




Neutral white → 4.000 K
 CRI ≥ 70




Cool white → 5.700 K
 CRI ≥ 70

12 Light distributions


Also available in satiné version




AH02




AP07

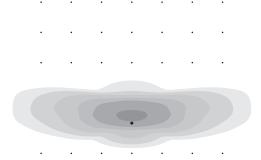


AS06



AS07



AS08



All light distribution options
 can be combined within the
 element.

Pole	Lighting elements	H1 [mm]	L2 [mm]	B1 [mm]	Lighting units	LED	Luminous flux [lm]②	Power [W]③
EL380	1	447	230	85	1–3	12–36	540–5,700	10–60
EL710	1	722	230	85	1–3	12–36	540–5,700	10–60
EL1250	1	1,242	230	85	1–3	12–36	540–5,700	10–60
EL2000	1–2	2,000	230	85	1–6	12–72	540–11,400	10–130
EL3000	1–3	3,000	230	85	1–9	12–108	540–17,200	10–190
EL4000	1–4	4,000	230	85	1–12	12–144	540–22,900	10–260
EL5000	1–5	5,000	230	85	1–15	12–180	540–28,700	10–330
EL6000	1–6	6,000	230	85	1–18	12–216	540–34,400	10–390