


ZA


LIGHT COLUMNS




- 1 Housing accommodates up to 4 LED lighting units (LED Board: 4 LED)
- 2 Current feed: 200 mA–700 mA, depending on ambient temperature
- 3 Electronic operating device with DALI interface, 1–10 V or stand-alone programming
- 4 Various light distributions (symmetric or asymmetric) for area, street or walkway lighting
- 5 AP07, AS07 (also available in satiné version)
- 6 Lens made from PMMA, with aluminum support plate
- 7 Base body made of aluminum, PMMA tube (satiné)
- 8 Flush service door with junction box
- 9 Finish: polyester powder coating, anthracite (DB 703), other colours upon request

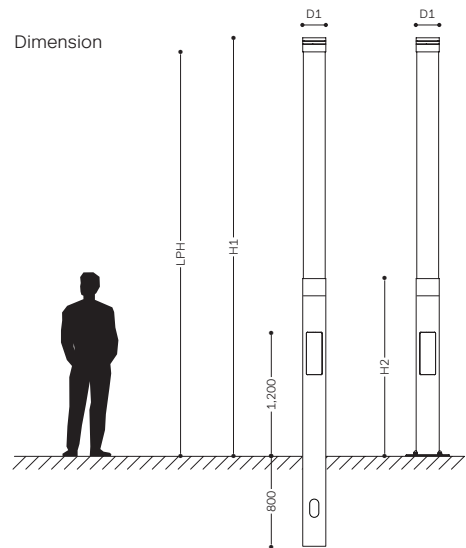

10 Colour temperature More colour rendering indexes upon request

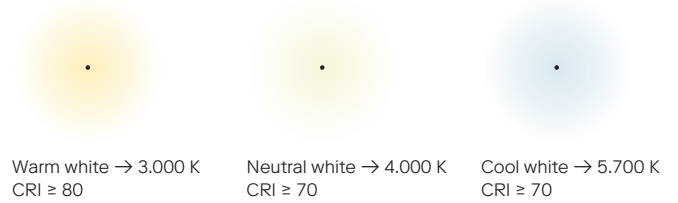

11 Light distributions Also available in satiné version

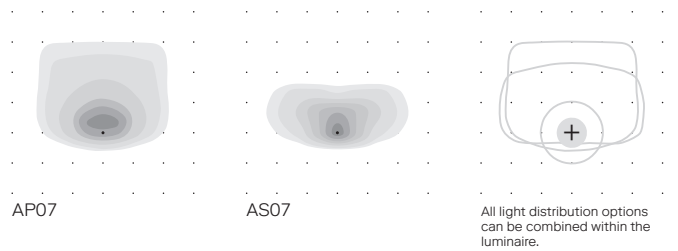

Model	LPH [m]	H1 [mm]	H2 [mm]	D1 [∅mm]	Lighting units	LED	Luminous flux [lm]②	Power [W]③
ZA190	3,5	3,650	1,700	190	4	16	950–3,500	10–34