

Model	LPH [m] ①	↓ ③	→ ④	⚠ ⑤	LU	Luminous Flux [lm]	Power [W]	D1 ⑥	L2 ⑥	H1 ⑥	B1 ⑥
ifround	0.9	0.02	0.07	3.0	1	190-730	2.5-7.0	140	/	40	75
ifround-W	/	0.02	0.01	0.8	1	190-730	2.5-7.0	140	152	40	75

① Other LPH available upon request ③ Projected windage area [m²] ④ Lateral windage area [m²] ⑤ Max. weight ③ ④ ⑤ Pole included ⑥ [mm]

#### Available Designs



Single



Wall-mounted

#### Accessory



Ground Spike

- Housing accommodates 1 lighting unit (LU), 4 LEDs
- Current feed: 200-500 mA, depending on ambient temperature
- Product compatible with A-Series
- Electronic control gear integrated
- Various light distributions for walkway lighting
- Lens made from PMMA
- Cover in single-pane safety glass (ESG), satin-finished
- Die-cast aluminum housing
- Pole made of extruded aluminium profile
- Finish: polyester powder coating, silver grey (RAL 9007 / DB 702), other colours upon request

⊕ □ IP65 RoHS IK08




#### Colour Temperatures

- 2,200 K CRI ≥ 70
- 2,700 K CRI ≥ 70
- 3,000 K CRI ≥ 80
- 4,000 K CRI ≥ 70

CRI ≥ 80, other colour rendering indexes available upon request


#### Dimension (values see table)

#### Light Distributions

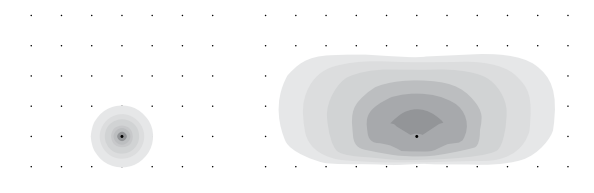

AH02  
Symmetric Wide Flood

AP06  
Asymmetric Forward Extra Side Throw

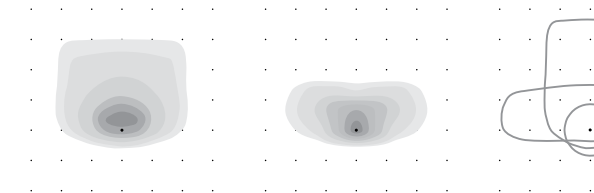

AP07  
Asymmetric Extra Forward

AS07  
Asymmetric Side Throw

Shape your own light  
Combine any light distributions

