


**Description:**

Wall light providing ambient glow from a frosted acrylic tube. Simple, clean aesthetic available in various colour temperatures, wall bracket finishes and control options. Supplied with cable gland and double insulated cable.

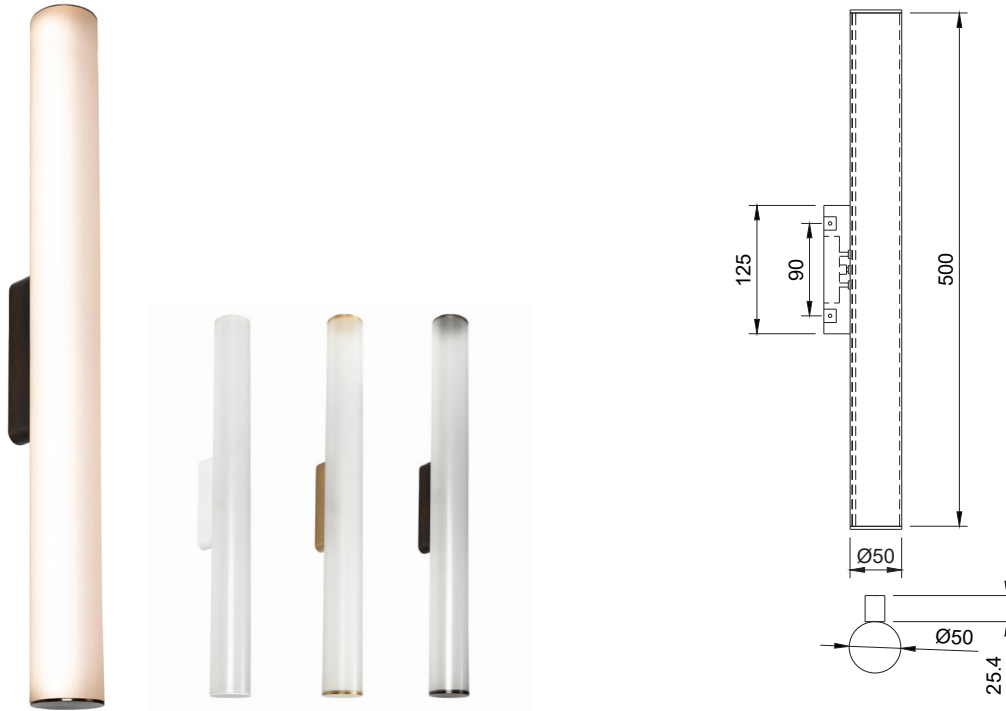

**Technical:**

LED TYPE		CONTROL GEAR	REMOTE
RATED POWER	10 watts	DIMMING PROTOCOL	DALI - 0-10V - PHASE DIM - ON/OFF
CRI	80	CABLE LENGTH	500MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	SURFACE MOUNTED
INPUT POWER / FORWARD VOLTAGE	24V	WEIGHT	800g
NOMINAL LUMENS	600lms	HARDWARE	GLASS LENS, O-RING, GLAND, CABLE
IP RATING	IP44	CONSTRUCTION	MACHINED METAL & HEATSINK
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

**Product Generator:** example 1735-PW-D-30-W-XW-0-10V-N/A

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL1735	AB Aged Brass	D Diffused	27 2700K	W Wall Mounted		DALI	N/A
	BR Brushed Brass		30 3000K			0-10V	
	PB Black		40 4000K			On/Off	
	PW White						
	CC Custom						

NL1735	-		-		-		-	
--------	---	--	---	--	---	--	---	--