


**Description:**

Low Profile Surface mounted Direct Wall Light, 6W Citizen CL-L104, Various CCT, IP54, finished in machined 6061 Aluminium (Powdercoated White, Black or Dark Bronze), UV stabilized frosted Acrylic diffuser, pre-fitted 500mm lead, remote 700mA constant current, 'Covert Mounting System'

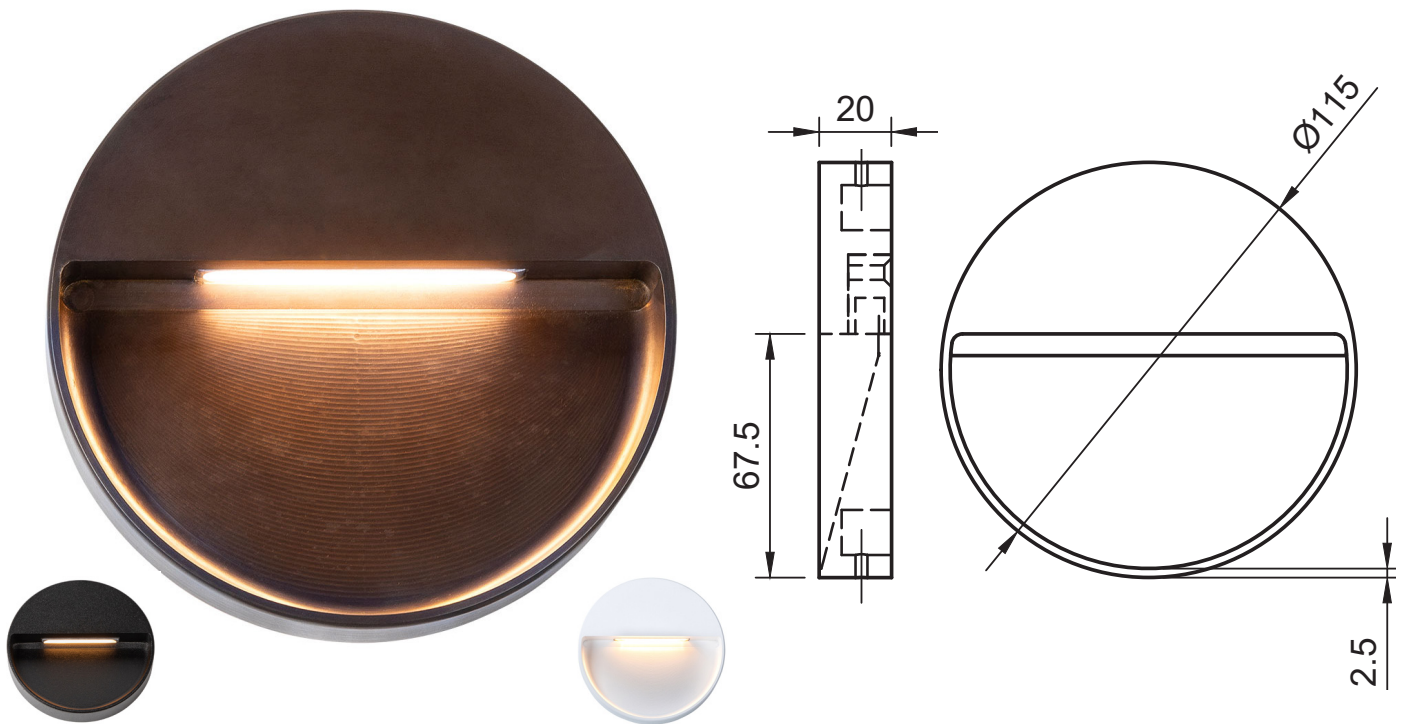

**Technical:**

LED TYPE	CITIZEN CLL104	CONTROL GEAR	REMOTE
RATED POWER	6W	DIMMING PROTOCOL	DALI - 0-10V - PHASE DIM - ON/OFF
CRI	80	CABLE LENGTH	500MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	SURFACE WALL
INPUT POWER / FORWARD VOLTAGE	700mA / 9V	WEIGHT	0.4KG
NOMINAL LUMENS	500lm	HARDWARE	FROSTED ACRYLIC DIFFUSER
IP RATING	IP54	CONSTRUCTION	MACHINED METAL & HEATSINK
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

**Product Generator:** example 3110-PB-D-30-W-6W-DALI-N/A

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL3110	PB Black	D Diffused	27 2700K	W Wall Mounted	6W / 700mA	DALI	N/A
	PW White		30 3000K			0-10V	
	AB Aged Brass		40 4000K			Phase	
						On/Off	

NL3110	-	-	-	-	-	-	-
--------	---	---	---	---	---	---	---