


if round

if round-BD
if round-WD
if round-WU
if round-CL
if round-WB

Architecture and the arts
Public space



Configurator

CE IP65 RoHS IK08

Housing

Housing material	Aluminum die-cast*
Housing finish	Polyester powder coating, ewoECP upon request***
Finish standard colour	Silver grey (RAL 9007 / DB 702)**
Glass	Safety glass (ESG)
Mounting options	Pole, wall, ceiling
	* pole made of extruded aluminium profile
	** other colours on request
	*** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance

Measurements

Model	LPH [m] ①	↑ ②	→ ③	Weight [kg] ④
if round-BD	0.9	0.02	0.07	3.0
if round-CL	/	0.02	0.01	1.1
if round-WD	/	0.02	0.01	0.8
if round-WU	/	0.02	0.01	0.8
if round-WB	/	0.02	0.01	0.9

① other LPH available upon request ② projected windage area [m²] ③ max. weight
④ lateral windage area [m²] ⑤ pole included

Electrical

A-Series	
Protection class	I/II
Voltage [V], [Hz]	220-240, 50/60
Current feed max. [mA]	650
LED power max. [W]	10

Operating conditions


Lifetime	Visit the configurator for specific lifetime options
----------	--

Driver

A-Series	
Control options	ON/OFF
Control accessories	Further accessories on request
Software	connex light management software for remote management of intelligent luminaire clusters



Precision lens optics

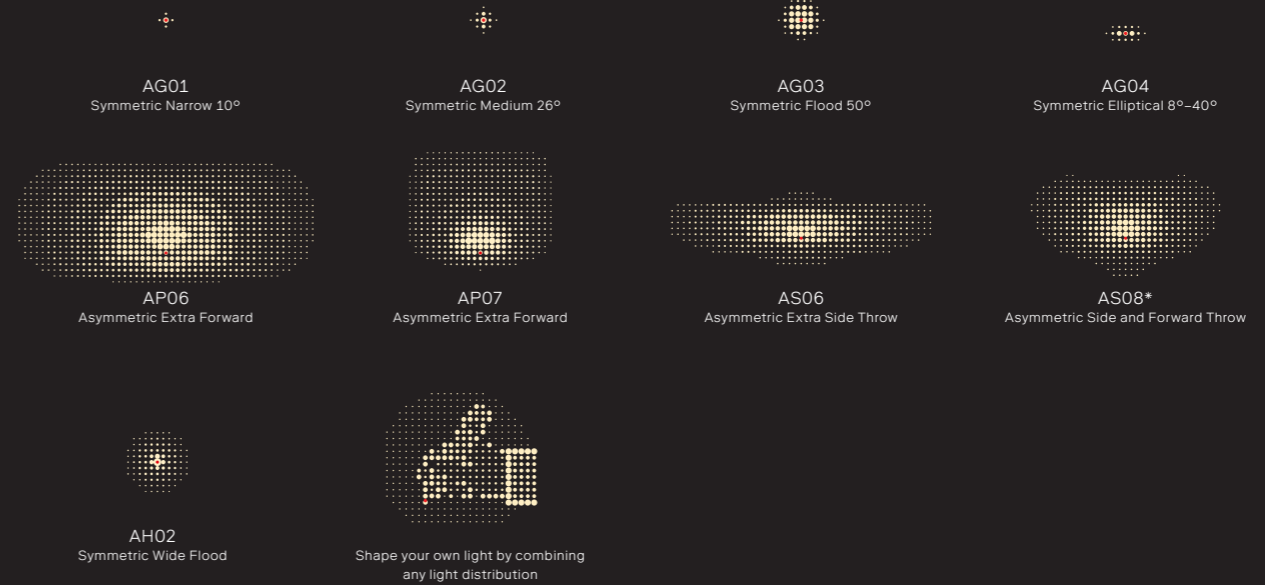

2,700 K CRI ≥ 80 3,000 K CRI ≥ 80

Performance

Optics	AH02	AG01	AG02	AG03	AG04	AP06	AP07	AS06	AS08
MacAdam ellipses (SDCM)	≤ 5 SDCM								
Model	if round-BD	if round-CL	if round-WD	if round-WB	if round-WU				
Light units	1	1	1	1	1				
Luminous flux [lm]	190-730	190-730	190-730	190-730	190-730				

Available designs



Accessories

