


DATASHEET

# LUCIAN Inclinatus 75

Surface mount LED profile with asymmetric light emission Suitable for direct or indirect lighting complete with opal diffuser. CCT options include 2400k, 2700k, 3000k, 4000k, and warm dim. High pitch INV LED as standard to ensure homogeneous light even in the shallowest of profiles. .

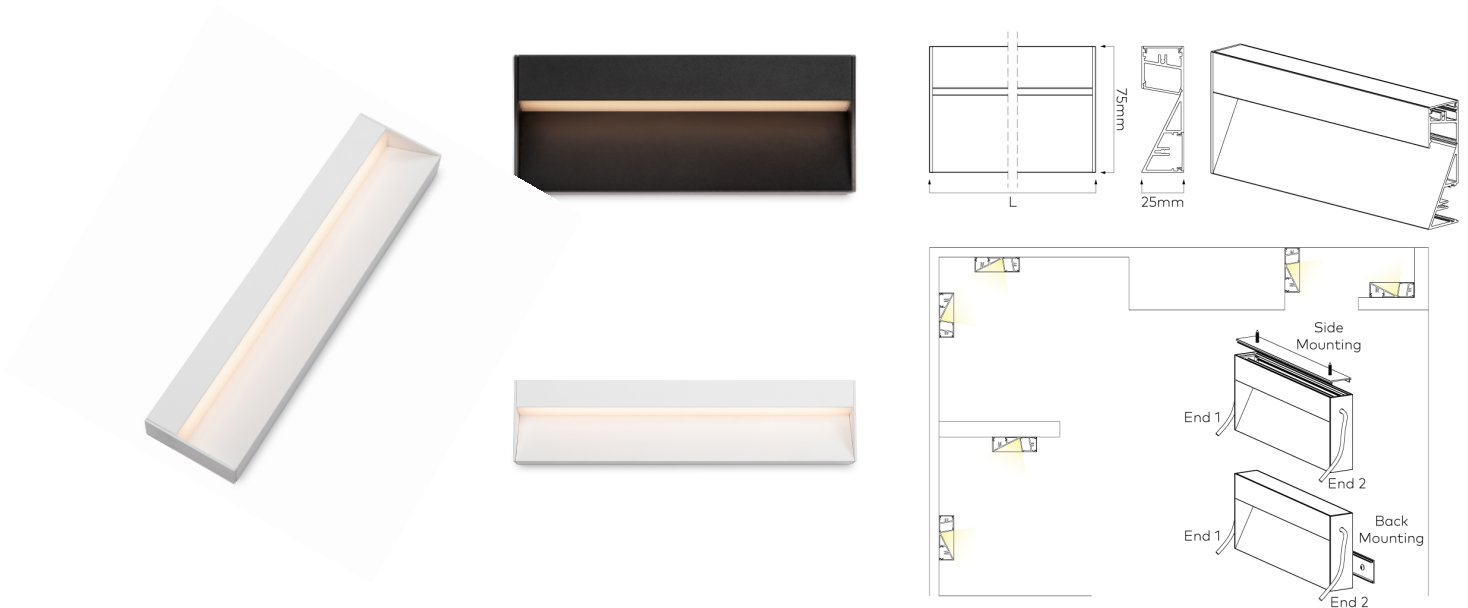

## DIMENSIONS

Width	Height	max Length	IP	Cutout	Diameter
75mm	25mm	2500mm	20	-	-

## TECHNICAL

Life maintainance	L80B10 50.000hr
Standard	EN/AS/NZS 60598-2-1, 62031, 62471
Binning/CRI	3-Step MacAdams CRI>90Ra
Output-S	9.6W/m 629lm/m-14.4W/m 946lm/m-19.2W/m 1216lm/m-25W/m 1550lm/m
Output-WD	9.6W/m 376lm/m-14.4W/m 498lm/m-20W/m 784lm/m-24W/m 830lm/m
Control Gear	Remote 24V
Warranty	5 years subject to the Company's T&C's

## CODE BUILDER

Model	Finish	CT-S	CT-WD	Led-S	Led-WD	Cable	Mounting	IP	Driver
IN-75	White	2400K	1800-2700K	9.6W	9.6W	End1	Back	20	Non-Dim
	Black	2700K		14.4W	14.4W	End2	Side		1-10V
		3000K		19.2W	20W	Both Ends			Dali
		4000K		25W	24W				