


FLEX 15 VERTICAL

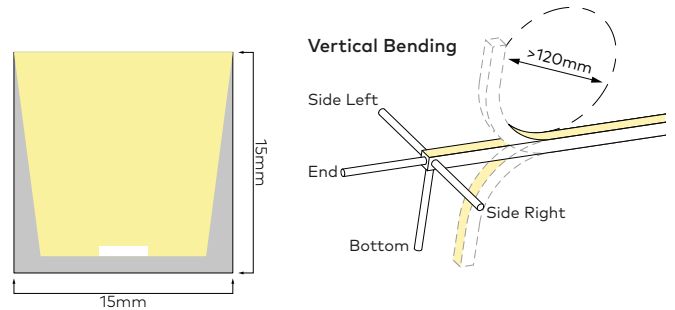

LUMINAIRE SPECIFICATION

Width	15mm
Height	15mm
Maximum length	5W/m : 20m 10W/m and 12W/m : 15m
Cut interval	50mm
Minimum bend diameter	>120mm
Material	White silicone
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	5W/m, 10W/m and 12W/m options
CCT	See options table below
CRI	>90Ra
Lumen package	Horizontal 5W/m : 290lm/m 10W/m : 510lm/m 12W/m : 570lm/m Vertical 5W/m : 260lm/m 10W/m : 480lm/m 12W/m : 530lm/m
Binning	3 Step
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
Driver requirement	Constant voltage
Voltage	24VDC

ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S15V Neon Flex 15 Vertical	1 White	C CRI >90	18 1800K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 60 6000K	S05 5W/m S10 10W/m S12 12W/m	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S15V	1	C				7		