


FLEX 20 VERTICAL

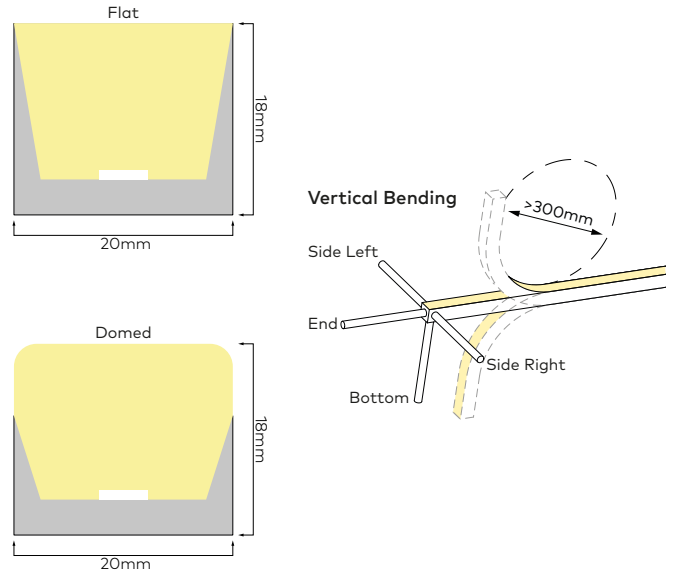

LUMINAIRE SPECIFICATION

Width	20mm
Height	18mm
Maximum length	5W/m : 20m 10W/m and 12W/m : 15m
Cut interval	50mm
Minimum bend diameter	>300mm
Material	White silicone
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	5W/m, 10W/m and 12W/m options
CCT	See options table below
CRI	>90Ra
Lumen package	5W/m : 270lm/m 10W/m : 490lm/m 12W/m : 540lm/m
Binning	3 Step
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
Driver requirement	Constant voltage
Voltage	24VDC

ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S20V Neon Flex 20 Vertical Flat	1 White	C CRI >90	18 1800K	S05 5W/m	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
			24 2400K	S10 10W/m			010 1m	
			27 2700K	S12 12W/m			030 3m	
			30 3000K				050 5m	
63S20VD Neon Flex 20 Vertical Domed	1 White	C CRI >90	35 3500K				100 10m	
			40 4000K					
			60 6000K					
	1	C				7		