
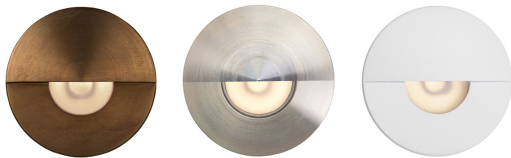


**Description:**

Recessed wall light, 1Watt Available in various colour temperatures fitted with Cree XP-G3, IP44/IP65, Machined Face in Solid Brass and fixed to Machined 6061 Aluminium Heat sink. Fitted with Borosilicate Glass lens, Double sealed using Nitrile O-Rings, Brass Cable gland and pre-fitted 500mm exterior rated power cable. Optional recess or surface mounting sleeve accessories available separately. Cutout 35mm for internal plasterboard. External IP applications require sleeve.

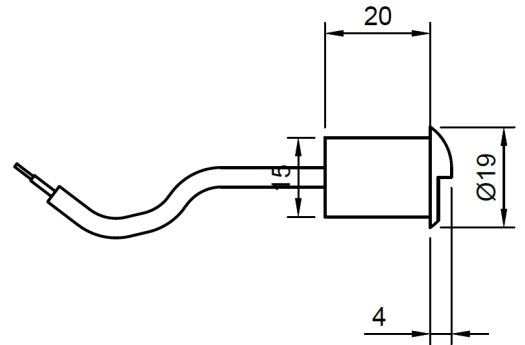

**Technical:**

LED TYPE	CREE XLAMP XP-G3	CONTROL GEAR	REMOTE
RATED POWER	1W	DIMMING PROTOCOL	DALI - 0-10V - PHASE DIM - ON/OFF
CRI	80	CABLE LENGTH	500MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	RECESSED / SLEEVE RECESSED FOR IP65
INPUT POWER / FORWARD VOLTAGE	350mA 3V	WEIGHT	0.5KG
NOMINAL LUMENS	82lm	HARDWARE	GLASS LENS, O-RING, GLAND, CABLE
IP RATING	IP44	CONSTRUCTION	MACHINED METAL & HEATSINK
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

**Product Generator:** example 1527-AB-M-30-R-3W-DALI-HC

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
	AB Aged Brass	N Narrow 10°	27 2700K	R Recessed	1W / 350mA	DALI	Clips
	BR Brushed Brass	M Medium 21°	30 3000K			0-10V	
	PB Black	W Wide 33°	40 4000K			Phase	
	PW White					On/Off	
	CC Custom						

-	-	-	-	-	-	-	-
---	---	---	---	---	---	---	---