


**Description:**

Belonging to the **Firefly Family** range, the Firefly Micro Downlight Adjustable ( 35 deg tilt) offers a simple, clean aesthetic available in various colour temperatures, optics, finishes and control options. The Firefly Family offers a variety of products suitable for various applications. The products contain the same LED chip and optics for a consistent approach. Supplied with cable gland and double insulated cable. The Family also consists of a **Firefly, XL** and **Deco** range creating a full suite of products. **Cut Out 58mm**

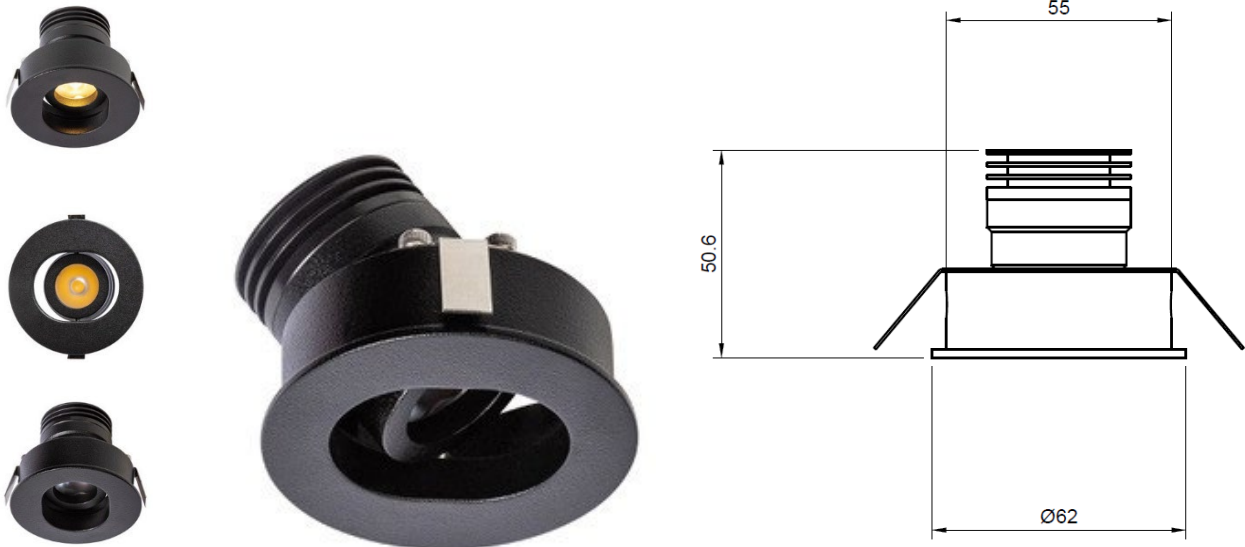

**Technical:**

LED TYPE	XP-G3/XHP-50	CONTROL GEAR	REMOTE
RATED POWER	1W-3W-4W-6W-9W*on request	DIMMING PROTOCOL	DALI - 0-10V - PHASE DIM - ON/OFF
CRI	80	CABLE LENGTH	500MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	RECESSED
INPUT POWER / FORWARD VOLTAGE	350mA - 700mA / 6V	WEIGHT	ON REQUEST
NOMINAL LUMENS	300lm - 476lm	HARDWARE	GLASS LENS, O-RING, GLAND, CABLE
IP RATING	IP44	CONSTRUCTION	MACHINED METAL & HEATSINK
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

**Product Generator:** example 7001-AB-M-30-R-4W-1-1

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL7014	AB Aged Brass	N Narrow 10°	27 2700K	R Recessed	1W / 350mA	DALI	HC Honeycomb Louver
	NB Natural Brass	M Medium 21°	30 3000K		3W / 700mA	0-10V	DL Diffuser Lens
	PB Black	W Wide 33°	40 4000K		4W / 350mA	Phase	
	PW White				6W / 700mA	On/Off	

NL7014	-	-	-	-	-	-	-
--------	---	---	---	---	---	---	---