




PROJECT		TYPE
SPECIFIER		
DATE		
NOTES		
PRODUCT CODE		

BEVEL ADJUSTABLE SMALL

'Bevel' ADJUSTABLE small is a budget driven, deep regressed tilt downlight with matching fixed version in the same size. Available with a selection of 'light engines' common across the entire 'Accent' range, common lighting quality and appearance is achievable between recessed / surface downlights and track spot options. 'Light engines' are available in varying output, colour temperature / warm dimmable, colour rendering and beam angles with interchangeable lenses. Bevel small is deep regressed for enhanced visual comfort. 'Bevel' Adjustable small is supplied with a powder coated cast aluminium housing, sold complete with your selected 'Light Engine'.

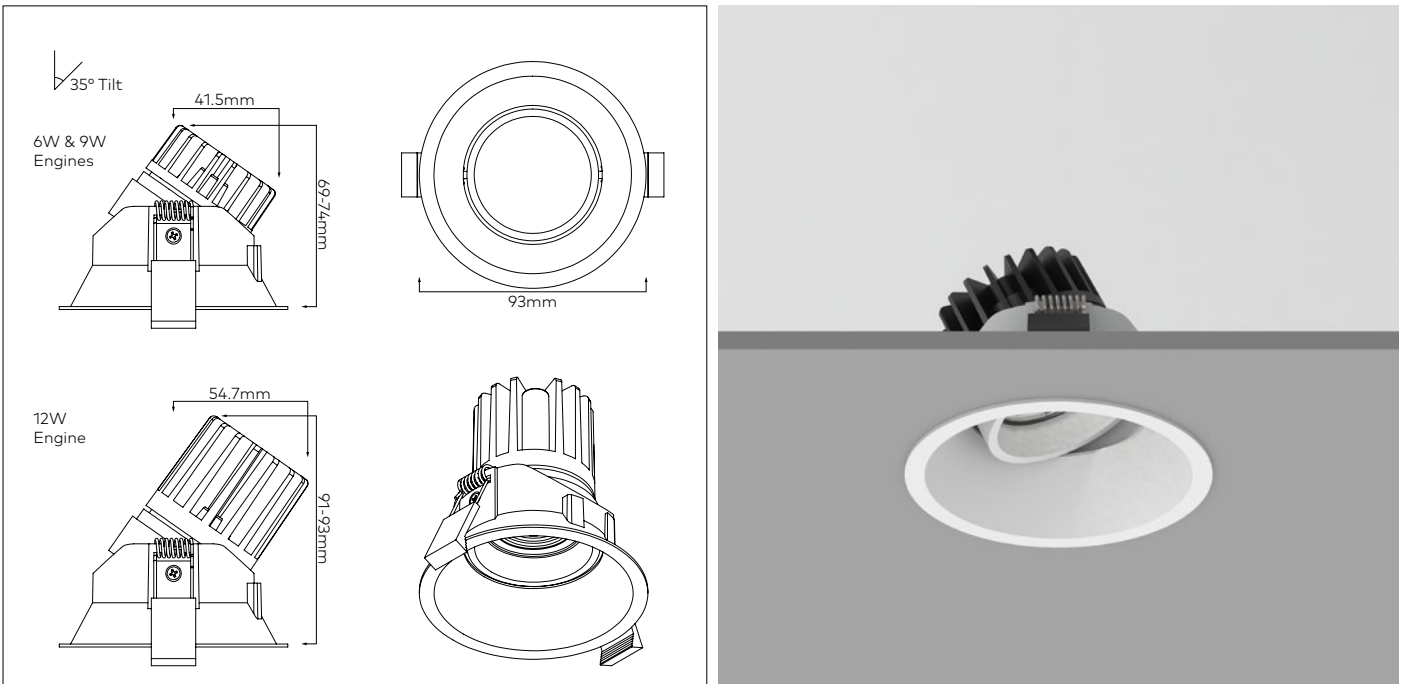

DIMENSIONS

DIAMETER	WIDTH	HEIGHT	LENGTH	CUT OUT
Ø93mm	N/A	As shown	N/A	Ø83mm

TECHNICAL DATA

Lamp type	Citizen	Supply voltage	See LED specification table
Lamp wattage & Delivered lumens ⁽¹⁾	6W : 541lm 6W WD : 355lm	Glow wire resistance	850°
	9W : 836lm 9W WD : 536lm	LED maintenance	Integrated
12W : 1117lm 12W WD : 685lm		Mounting surface classification	▽
Lamp life	50,000hrs L70	Connection type	Flex and Plug
Binning	2-Step MacAdams	Protection classification	⚡
CRI	90Ra	Standards	EN/AS/NZS 60598-2-2, 62031, 62471
Control gear	Remote	Warranty	5 years
Materials	Cast aluminium, matt powder coated		

⁽¹⁾ Luminous flux @3000K with medium optics. Please see the full specifications for further photometric data.

SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	BEAM ANGLE	FINISH	CCT	DRIVER	ENGINE / POWER	ACCESSORY
Accent	Bevel	Small	Recessed	Adjustable	10° (L10) 20° (L20) 35° (L35) 45° (L45) 60° (L60)	White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm Dim 2700-1800K (2718)	Phase (2) 0-10V (3) DALI (8)	6W (BF6) 9W (B9) 12W (C12) Warm Dim (B6W,B9W,C12W)	Honeycomb Louvre (-H) Solite Lens (-SO) Spread Lens (-SL)

ORDER CODE (Bold above denotes code)

A	B	S	R	A						
----------	----------	----------	----------	----------	--	--	--	--	--	--