


DARK ROUND WALLWASH 100

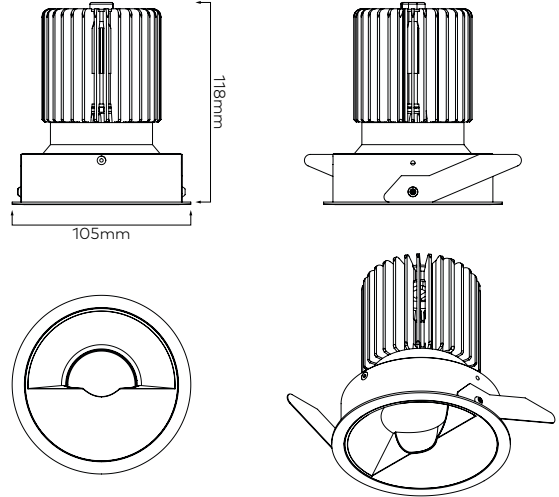

LUMINAIRE SPECIFICATION

Height	Refer to line drawing
Bezel	Ø105mm
Hole cut-out	Ø100mm
Luminaire material	Aluminium with textured powder coat finish.
Light source	COB LED
Optics	Interchangeable lens & reflectors
Driver	Remote
IP Rating	IP20 and IP44 options

LED SPECIFICATION

LED	Citizen high intensity	
Source LED output	12W	1389lm
	16W	1803lm
	20W	2088lm
Typical delivered output	12W	793lm
	16W	1018lm
	20W	1183lm
CCT	2700K, 3000K, 4000K	
CRI	>90Ra	
Binning	2 Step	
Optics	35° with wallwash reflector	
Lifetime (L70)	>50,000 hrs based on LM-80 and TM-21 manufacturers applicable test data	
Driver requirement	Constant current	
Drive current	12W :	350mA
	16W :	450mA
	20W :	550mA
Forward voltage	35VDC	

ORDERING INFORMATION

example 23541L35.1SC32D20C

BEAM ANGLE	FINISH	REFLECTOR	LED CCT	DRIVER	VERSION	IP RATING
23541L35 35°	1 White	SC Silver chrome	2 2700K	1 Non dimming 2 Phase dimming 3 0-10V dimming 4 DALI dimming	C12C 12W CRI >90 D16C 16W CRI >90 D20C 20W CRI >90	4 IP44
	2 Black		3 3000K			
	7 Silver		4 4000K			