


## FLEX 15 HORIZONTAL HIGH OUTPUT

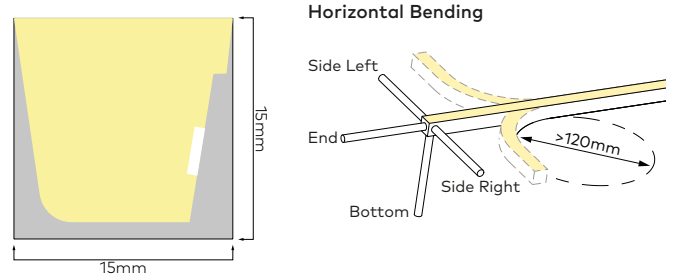

### LUMINAIRE SPECIFICATION

<b>Width</b>	15mm
<b>Height</b>	15mm
<b>Maximum length</b>	10W/m and 13.5W/m : 5m 12W/m : 15m
<b>Cut interval</b>	10W/m and 13.5W/m : 62.5mm 12W/m : 50mm
<b>Minimum bend diameter</b>	>120mm
<b>Material</b>	White silicone
<b>Mounting</b>	Surface
<b>IP Rating</b>	IP67
<b>Protection</b>	UV, flame, salt and chlorine resistant
<b>Standards</b>	EN/AS/NZS 60598-2-1, 62031, 62471
<b>Warranty</b>	5 Years

### LED SPECIFICATION

<b>LED Wattage</b>	10W/m , 12W/m and 13.5W/m options		
<b>CCT</b>	See options table below		
<b>CRI</b>	>80R and >90Ra options		
<b>Lumen package</b>		CRI >80	CRI >90
10W/m	920lm/m	825lm/m	825lm/m
12W/m	860lm/m	770lm/m	770lm/m
13.5W/m	1290lm/m	1160lm/m	1160lm/m
<b>Binning</b>	3 Step		
<b>Lifetime (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data		
<b>Driver requirement</b>	Constant voltage		
<b>Voltage</b>	24VDC		

### ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S15HOH Neon Flex 15 Horizontal	1 White	B CRI >80	18 1800K	S10 10W/m	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
			24 2400K				010 1m	
		C CRI >90	27 2700K	S12 12W/m			030 3m	
			30 3000K				050 5m	
		35 3500K	S13 13.5W/m	100 10m				
		40 4000K						
		60 6000K						
		63S15HOH	1					