



## FLEX 10 HORIZONTAL RGBW



Horizontal Bending

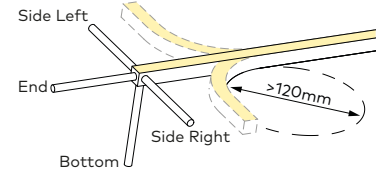

### LUMINAIRE SPECIFICATION

Width	10mm
Height	20mm
Maximum length	5m and 10m options
Cut interval	100mm
Minimum bend diameter	>120mm
Material	White silicone
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

### LED SPECIFICATION

LED Wattage	16W/m
CCT	See options table below
Lumen package	R : 40lm/m, G : 85lm/m, B : 20lm/m W : 105m/m
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
Driver requirement	Constant voltage
Voltage	24VDC

### ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH			
63S10H Neon Flex 10 Horizontal	1	White	RGBW27	RGBW-2700K	S16 16W/m (5m max.) L16 16W/m (10m max.)	E End B Bottom SL Side Left SR Side Right	7 IP67	003	0.3m	.XXXX Length in mm
			RGBW30	RGBW-3000K				010	1m	
			RGBW40	RGBW-4000K				030	3m	
			RGBW60	RGBW-6000K				050	5m	
								100	10m	
63S10H	1				7					