




## FLEX 12 HORIZONTAL RGB

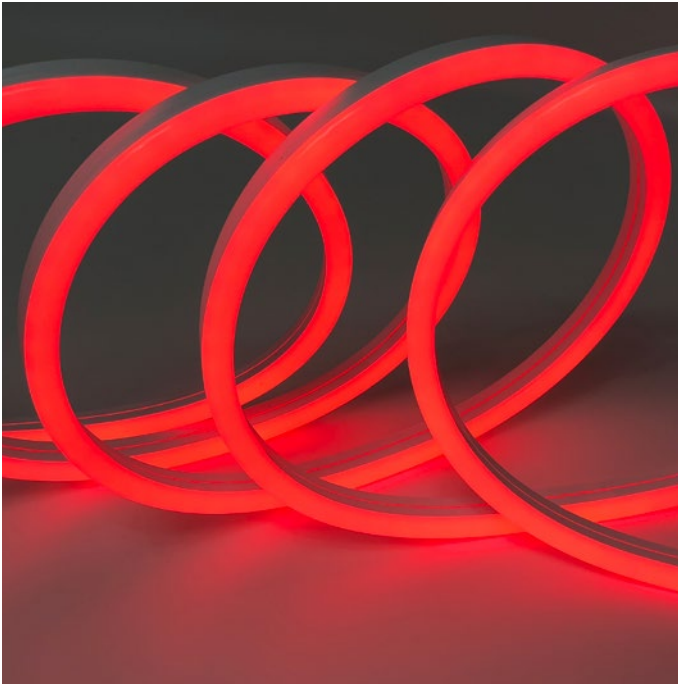

Horizontal Bending

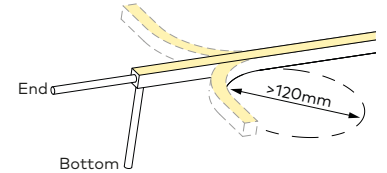

### LUMINAIRE SPECIFICATION

<b>Width</b>	12mm / 15mm
<b>Height</b>	25mm
<b>Maximum length</b>	RGB : 5m and 13m options
<b>Cut interval</b>	100mm
<b>Minimum bend diameter</b>	>120mm
<b>Material</b>	White silicone
<b>Mounting</b>	Surface
<b>IP Rating</b>	IP67
<b>Protection</b>	UV, flame, salt and chlorine resistant
<b>Standards</b>	EN/AS/NZS 60598-2-1, 62031, 62471
<b>Warranty</b>	5 Years

### LED SPECIFICATION

<b>LED Wattage</b>	12W/m
<b>CCT</b>	See options table below
<b>Lumen package</b>	R : 45lm/m, G : 100lm/m, B : 20lm/m
<b>Lifetime (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>Driver requirement</b>	Constant voltage
<b>Voltage</b>	24VDC

### ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S12H Neon Flex 12 Horizontal	1 White	RGB RGB	S12 12W/m (5m max.) L12 12W/m (13m max.)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S12H	1	RGB			7		