
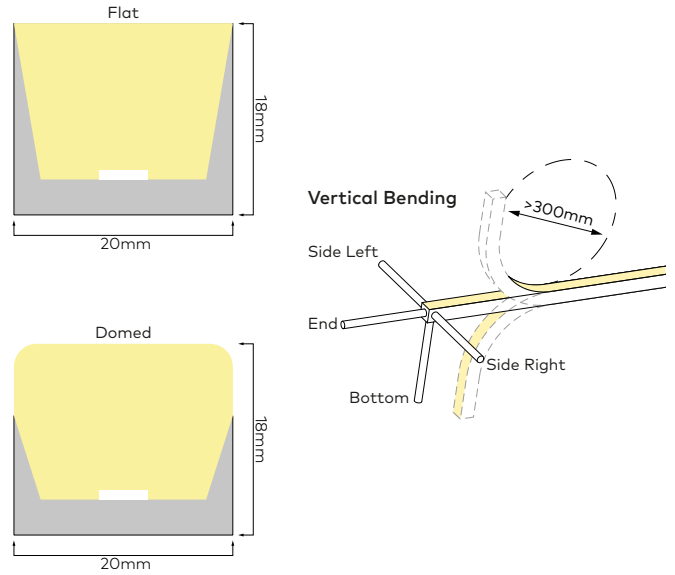


## FLEX 20 RGBW

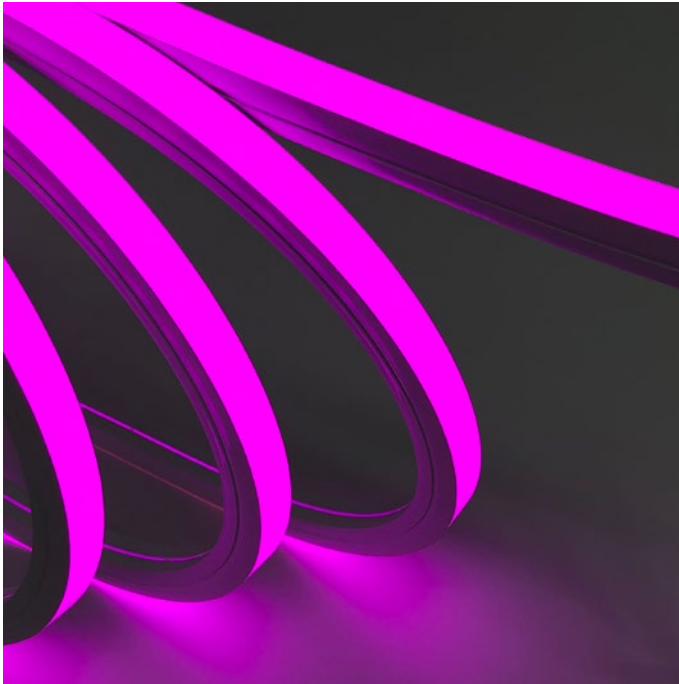

### LUMINAIRE SPECIFICATION

Width	20mm
Height	18mm
Maximum length	5m and 10m options
Cut interval	100mm
Minimum bend diameter	>300mm
Material	White silicone
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

### LED SPECIFICATION

LED Wattage	16W/m
CCT	See options table below
Lumen package	R : 70lm/m, G : 160lm/m, B : 30lm/m W : 200m/m
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
Driver requirement	Constant voltage
Voltage	24VDC

### ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH	
63S20V Neon Flex 20 Vertical Flat	1 White	RGBW27	RGBW-2700K	S16	16W/m (5m max.)	7 IP67	003 0.3m	.XXXX Length in mm
		RGBW30	RGBW-3000K	L16	16W/m (10m max.)		010 1m	
		RGBW40	RGBW-4000K				030 3m	
		RGBW60	RGBW-6000K				050 5m	
63S20VD Neon Flex 20 Vertical Domed						100 10m		
	1				7			