


Description:

Garden spike mounted fitted with 24V COLORS D6240, Various colour temperatures, IP65, finished in Brass (Aged), 3 different spike heights available, 500mm lead, requires remote 24V driver.

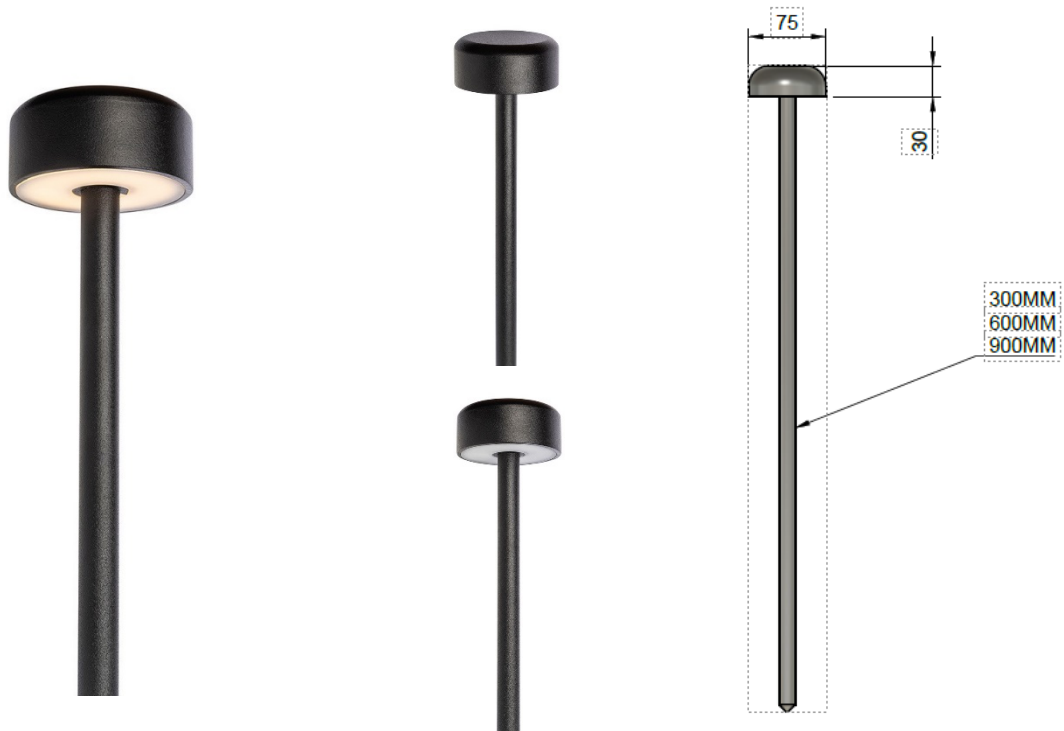

Technical:

LED TYPE	COLORS D6240	CONTROL GEAR	REMOTE
RATED POWER	3W	DIMMING PROTOCOL	DALI - ON/OFF
CRI	80	CABLE LENGTH	300/600/900 MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	SPIKE
INPUT POWER / FORWARD VOLTAGE	24V	WEIGHT	0.5KG
NOMINAL LUMENS	100lm	HARDWARE	GLASS LENS, O-RING, GLAND, CABLE
IP RATING	IP65	CONSTRUCTION	MACHINED METAL & HEATSINK
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

Product Generator: example 0069-AB-D-30-SP-3W-DALI

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL0069	AB Aged Brass	D Diffused	27 2700K	SP3 Spike 300mm	3W / 24V	DALI	N/A
	PB Black		30 3000K	SP6 Spike 600mm		0-10V	
	PW White		40 4000K	SP9 Spike 900mm		Phase	
	CC Custom					On/Off	

NL0070	-	-	-	-	-	-	-
--------	---	---	---	---	---	---	---