
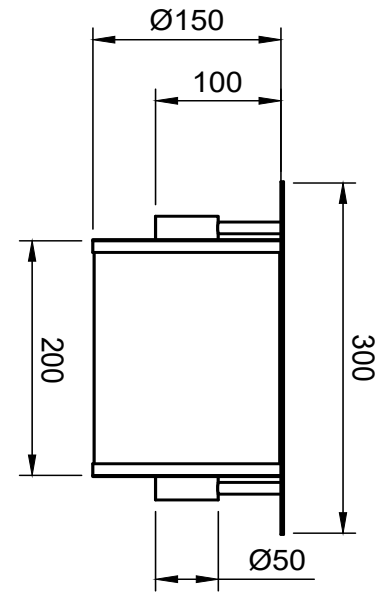


Description:

Surface mount wall light with indirect source to provide diffused glow. Available in various colour temperatures, IP44, various finishes made from machined solid brass. UV stabilised frosted diffuser, pre-fitted 500mm lead, remote driver.



Technical:

LED TYPE	XHP-50 Gen 2	CONTROL GEAR	REMOTE
RATED POWER	4W	DIMMING PROTOCOL	DALI - 0-10V - PHASE DIM - ON/OFF
CRI	80	CABLE LENGTH	500MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	SURFACE WALL
INPUT POWER / FORWARD VOLTAGE	350mA / 6V	WEIGHT	1.2KG
NOMINAL LUMENS	300lm	HARDWARE	GLASS, WALL PLATE, CABLE
IP RATING	IP44	CONSTRUCTION	MACHINED METAL & HEATSINK
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

Product Generator: example NL0666CC-AB-D-30-W-4W-DALI-N/A

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL0666CC	AB Aged Brass	D Diffused	27 2700K	W Wall Mounted	4W / 350mA	DALI	N/A
	NB Natural Brass		30 3000K			1-10V	
	PB Black		40 4000K			PHASE	
	PW White					ON/OFF	

NL0666	-	-	-	-	-	-	-
--------	---	---	---	---	---	---	---