


Description:

the Brandolino Spike is a fix glowing low glare fixture ideal for ambient lighting in planter beds and greenery. Supplied with a CREE XLamp XP-G3. Available in various colour temperatures and finishes. IP65, Frosted acrylic diffuser, pre-fitted 500mm lead.

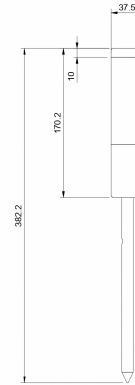

Technical:

LED TYPE	CREE XLAMP XP-G3	CONTROL GEAR	REMOTE
RATED POWER	1W - 3W	DIMMING PROTOCOL	DALI - 0-10V - PHASE DIM - ON/OFF
CRI	80	CABLE LENGTH	500MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	SPIKE
INPUT POWER / FORWARD VOLTAGE	350mA CC / 3V	WEIGHT	ON REQUEST
NOMINAL LUMENS	90 - 180lm	HARDWARE	FROSTED ACRYLIC DIFFUSER, CABLE
IP RATING	IP65	CONSTRUCTION	MACHINED METAL
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

Product Generator: example 1604-AB-M-30-SP-1W-ON/OFF-N/A

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL1610	AB Aged Brass	D Diffused	27 2700K	SP Spike	1W / 350mA	DALI	N/A
	NB Natural Brass		30 3000K		3W / 700mA	0-10V	
	PB Black		40 4000K			PHASE	
	PW White					ON/OFF	

NL1610	-	-	-	-	-	-	-
--------	---	---	---	---	---	---	---