


Description:

Belonging to the **Firefly Family** range, the Firefly Micro Spot offers a simple, clean aesthetic available in various colour temperatures, optics, finishes and control options. The Firefly Family offers a variety of products suitable for various applications. The products contain the same LED chip and optics for a consistent approach. Supplied with cable gland and double insulated cable. The Firefly Family also consists of a **Standard Firefly**, **XL** and **Deco** range creating a full suite of products.

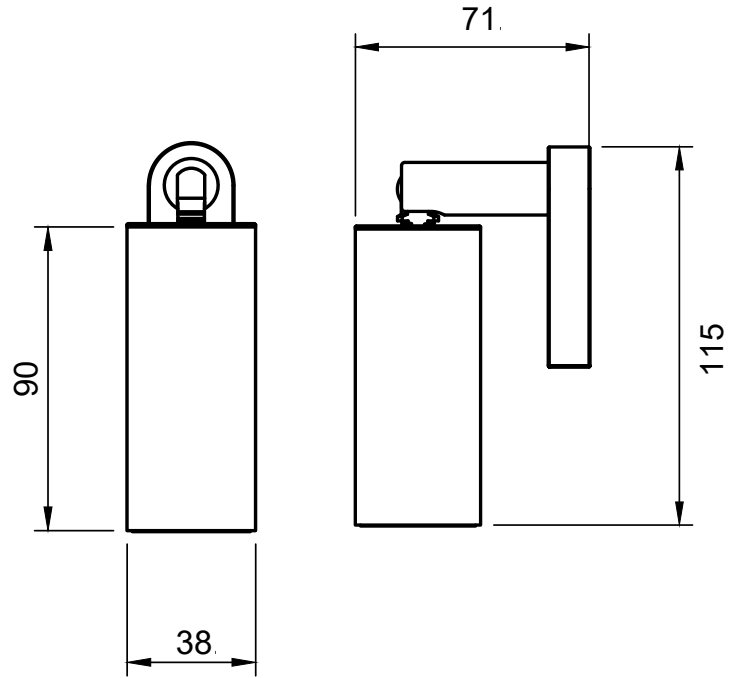

Technical:

| | | | |
|--------------------|-------------------------------|------------------|-----------------------------------|
| LED TYPE | XHP-50 Gen 2 | CONTROL GEAR | REMOTE |
| RATED POWER | 4W - 6W | DIMMING PROTOCOL | DALI - 0-10V - PHASE DIM - ON/OFF |
| CRI | 80 | CABLE LENGTH | 500MM STANDARD LENGTH |
| BEAM ANGLES | NOMINATED IN TABLE BELOW | MOUNTING OPTIONS | SURFACE MOUNTED |
| INPUT POWER | 6V / NOMINATED IN TABLE BELOW | WEIGHT | ON REQUEST |
| NOMINAL LUMENS | 300lm - 476lm | HARDWARE | GLASS LENS, O-RING, GLAND, CABLE |
| IP RATING | IP65 | CONSTRUCTION | MACHINED METAL & HEATSINK |
| COLOUR TEMPERATURE | 2700K - 3000K - 4000K | WARRANTY | 2 YEARS |

Product Generator: example 7013CC-PB-M-30-SM-4W-DALI-HC

| Model | Finish | Beam Angle | CCT | Mounting | Wattage | Dimming | Accessory |
|----------|------------------|----------------------|----------|------------------|-------------|---------|---------------------|
| NL7013CC | AB Aged Brass | N Narrow 10° | 27 2700K | SM Surface Mount | 4W / 350mA | DALI | HC Honeycomb Louver |
| | NB Natural Brass | M Medium 21° | 30 3000K | | 6W / 700mA | 0-10V | DL Diffuser Lens |
| | PB Black | W Wide 33° | 40 4000K | | | Phase | |
| | PW White | E Elliptical 26°x41° | | | | On/Off | |
| NL7013CV | AB Aged Brass | N Narrow 10° | 27 2700K | SM Surface Mount | 4W / 24V DC | On/Off | HC Honeycomb Louver |
| | NB Natural Brass | M Medium 21° | 30 3000K | | 6W / 24V DC | | DL Diffuser Lens |
| | PB Black | W Wide 33° | 40 4000K | | | | |
| | PW White | E Elliptical 26°x41° | | | | | |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| - | - | - | - | - | - | - | - |
|---|---|---|---|---|---|---|---|