


**Description:**

Belonging to the **Twiggy family**, the Twiggy Pendant is a single directional rod mounted spotlight ideal for accent lighting. Supplied with a CREE XLamp XP-G3. Available in various colour temperatures, beam angles and finishes. IP65, Borosilicate Glass Lens, pre-fitted Honey Comb Baffle, pre-fitted 500mm lead.

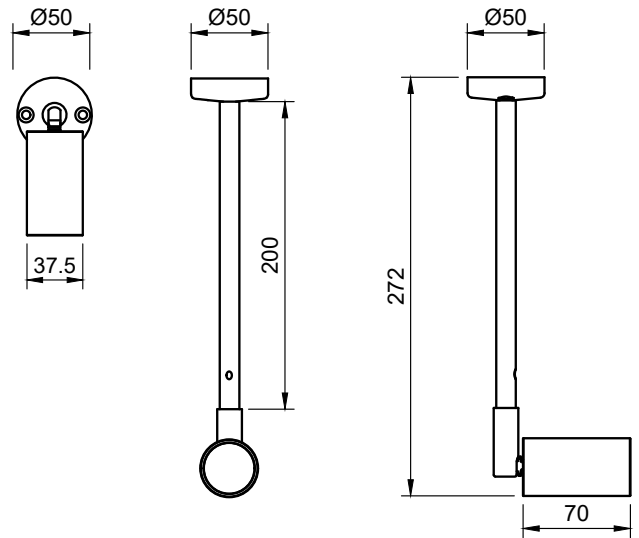

**Technical:**

LED TYPE	CREE XLAMP XP-G3	CONTROL GEAR	REMOTE
RATED POWER	1W - 3W	DIMMING PROTOCOL	DALI - 0-10V - PHASE DIM - ON/OFF
CRI	80	CABLE LENGTH	500MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	SURFACE CEILING
INPUT POWER / FORWARD VOLTAGE	NOMINATED IN TABLE BELOW / 3V	WEIGHT	ON REQUEST
NOMINAL LUMENS	190lm - 320lm	HARDWARE	GLASS LENS, CABLE
IP RATING	IP65	CONSTRUCTION	MACHINED METAL
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

**Product Generator:** example 1605CC-AB-M-30-SM-1W-ON/OFF-N/A

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL1605CC	AB Aged Brass	N Narrow 10°	27 2700K	SM Surface Mount	1W / 350mA	DALI	Honeycomb Louver
	NB Natural Brass	M Medium 21°	30 3000K			0-10V	Diffuser Lens
	PB Black	W Wide 33°	40 4000K		PHASE		
	PW White				ON/OFF		
NL1605CV	AB Aged Brass	N Narrow 10°	27 2700K	SM Surface Mount	1W / 24V DC	DALI	Honeycomb Louver
	NB Natural Brass	M Medium 21°	30 3000K			0-10V	Diffuser Lens
	PB Black	W Wide 33°	40 4000K		PHASE		
	PW White				ON/OFF		

NL1605	-	-	-	-	-	-	-
--------	---	---	---	---	---	---	---