

# Chameleon

C365 Slice

Projector  
Wall luminaire  
Pole mounted system




DB 703  
Anthracite

ewo  
colours

[Configurator](#)


CE RoHS IK08

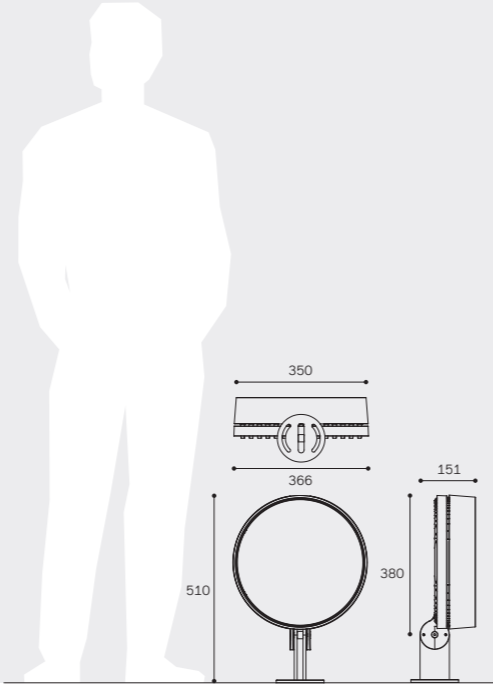


Precision lens optics



AG03  
Symmetric Flood 48°



AP07  
Asymmetric Extra Forward



AS08  
Asymmetric Side and Forward Throw

Monochrome



2,200 K  
CRI ≥ 70\*



3,000 K  
CRI ≥ 70\*



4,000 K  
CRI ≥ 70\*

\* additional light colours on request

## Housing

|                        |  |
|------------------------|--|
| Housing material       | Aluminum die-cast  |
| Housing finish         | Polyester powder coating (ewoECP upon request**)   |
| Finish standard colour | RAL 9007*  |
| Glass                  | Safety glass (ESG)   |
| Mounting options       | Pole, wall, surface<br>* other colours on request<br>** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance |

## Measurements

| Model | $\theta_{\text{p}}$ @         | $\theta_{\text{l}}$ @ | Weight [kg] |
|-------|-------------------------------|-----------------------|-------------|
| C365  | 0.045*                        | 0.055*                | 11.2*       |
|       | ① Projected windage area [m²] |                       |             |
|       | ② Lateral windage area [m²]   |                       |             |
|       | * without accessories         |                       |             |

## Performance

| Distribution            | AG03     | AP07 | AS08 |
|-------------------------|----------|------|------|
| Beam angle              | 48°      | -    | -    |
| MacAdam ellipses (SDCM) | ≤ 3 SDCM |      |      |
| Nr. of LEDs             | 128      |      |      |
| Luminous flux [lm]      |          |      |      |
| Monochrome at 4,000 K   | 34,800   |      |      |

## Electrical

A-Series

|                   |     |
|-------------------|-----|
| Protection class  | I   |
| Voltage [V], [Hz] |     |
| Current max. [mA] | 900 |
| LED power [W]     | 345 |

## Operating conditions

|          |  |
|----------|--|
| Lifetime | Visit the <a href="#">configurator</a> for specific lifetime options |
|----------|--|

Driver (external) Monochrome

|                        |   |
|------------------------|---|
| Control Options        |   |
| Programming [optional] | Constant Lumen Output (CLO)<br>Emergency power supply (AC/DC)<br>Stand-alone              |
| Control accessories    | Further accessories on request  |
| Software               | connexx light management software for remote management of intelligent luminaire clusters |