


CAN SWIVEL 75

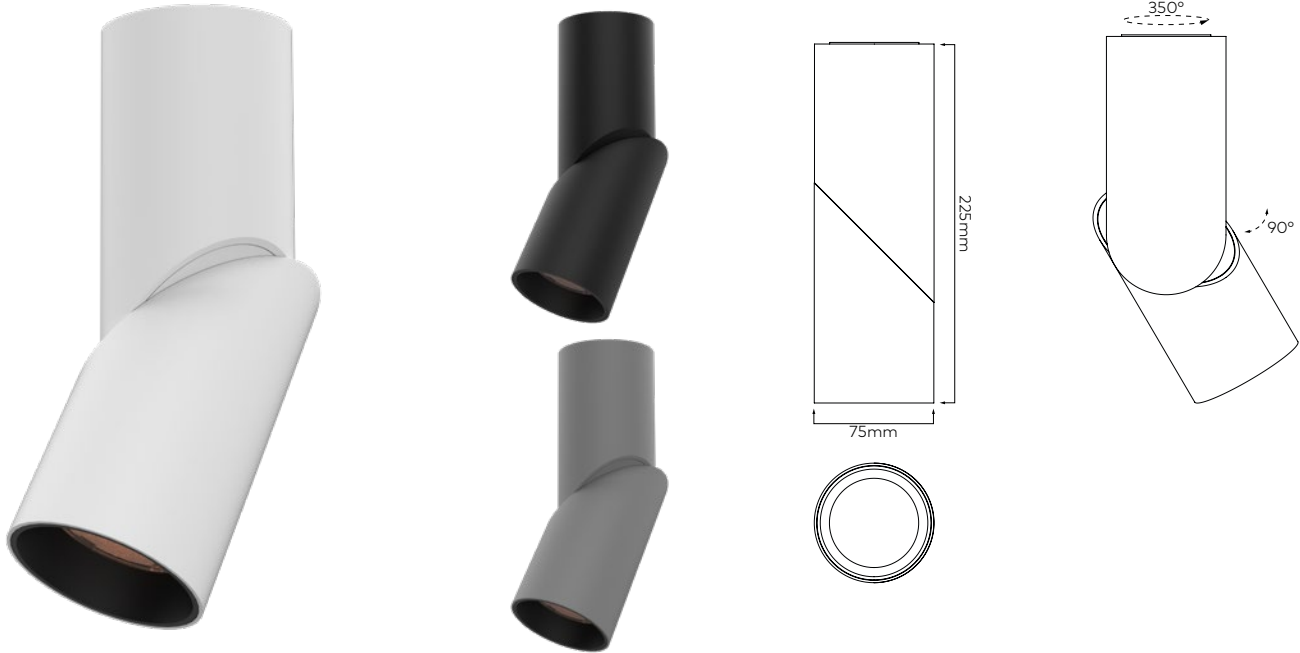

LUMINAIRE SPECIFICATION

Bezel	Ø75mm
Length	225mm
Adjustability	Rotate : 350° Tilt : 90°
Mounting	Surface
Luminaire material	Aluminium with textured powder coat finish.
Light source	LED with interchangeable optics
Driver	Integral
IP Rating	IP20
Accessories	Honeycomb louvre Solite lens Spread lens

LED SPECIFICATION

LED	CREE	
Typical lumen output⁽ⁱ⁾		
9W	CRI >80	CRI >90
12W	1064lm	905lm
16W	1431lm	1223lm
	1676lm	1431lm
CCT	2700K, 3000K, 4000K	
CRI	>80Ra and >90Ra Options	
Binning	2 Step	
Optics	15°, 25°, 25°, 50°	
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data	
Driver requirement	Constant current	
Drive current / voltage	9W	250mA / 36VDC
	12W	350mA / 36VDC
	16W	450mA / 36VDC

ORDERING INFORMATION

example 240175L25.12216C-H

BEAM ANGLE	FINISH	LED CCT	DRIVER	LED VERSION	ACCESSORIES
240175L15 15°	1 White	2 2700K	2 Phase dimming	9 9W CRI >80	-H Honeycomb louvre
240175L25 25°	2 Black	3 3000K	3 0-10V dimming	9C 9W CRI >90	-FR Frosted lens
240175L35 35°	7 Silver	4 4000K	4 DALI dimming	12 12W CRI >80	-SL Spread lens
240175L50 50°				12C 12W CRI >90	
				16 16W CRI >80	
				16C 16W CRI >90	