


## Description:

A new member of the Firefly family, Firefly Square Pillar offers a simple clean aesthetic, produced in a range of colour temperatures, optics, finishes and control options. Firefly Square Pillar shares the technical features of the remainder of the Firefly family ensuring consistent illumination, product quality and configuration. Designed to illuminate both above and below the installed light fitting.

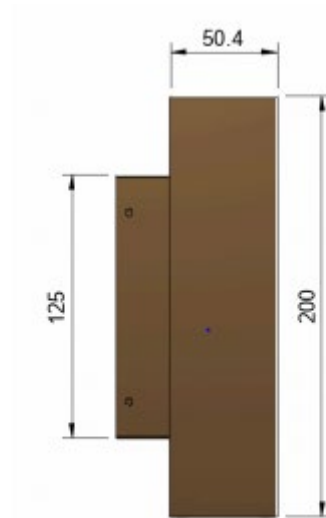

## Technical:

LED type	Cree XHP50-2	Control gear	Remote
Rated power	8w, 12w or 18w	Dimming protocols	Dali, 0-10V, Phase Dim, On/Off
CRI	80	Cable length	300 mm
Beam angles	Nominated in table below	Mounting options	Surface
Input power	Nominated in table below	Weight	1.4 kg
Nominal lumens	2 x 300lm – 476lm – 780lm	Hardware	Covert Mounting System
IP rating	IP65	Construction	Machined metal, glass lens
Colour temperature	2700K – 3000K – 4000K	Warranty	Two years

## Product Generator: example NL-6006-AB-M-30-SM-8W-4-N/A

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessories
<b>NL-6006CC</b>	AB Aged brass	N Narrow 10°	27 2700K	SM Surface	8w/350 ma	1 Dali	N/A
	BR Brushed brass	M Medium 21°	30 3000K		12w/700 ma	2 0-10V	
	PB Black	W Wide 33°	40 4000K		18w/1050ma	3 Phase	
	PW White					4 On/Off	
	CC Custom						
<b>NL-6006CV</b>	AB Aged brass	N Narrow 10°	27 2700K	SM Surface	8w/24 Volts	On/Off	N/A
	BR Brushed brass	M Medium 21°	30 3000K		12w/24 Volts		
	PB Black	W Wide 33°	40 4000K		18w/24 Volts		
	PW White						
	CC Custom						

## Order Code

<b>NL-6006</b>				SM			N/A
----------------	--	--	--	----	--	--	-----